Highlight

Motion Detection and NotiQcations

When you are away from home, there are always people and things you will worry about. Let the camera help you stay with them anytime, anywhere. Receive a notiQcation if your little boy is working on the kitchen to make his lunch, or your fur baby is messing around inside kitchen.

Features

Smooth Pan and Tilt

360Ë horizontal range and 114Ë vertical range.

High DeQnition Video

Capture every detail in crystal-clear 1080p deQnition.

Advanced night view

Even at night, the camera can provide a visual distance of up to 30 ft.

Safe Storage

Support Micro SD Card* (up to 128 GB).

* The SD card is not provided.

Live View

Always stay with that matters most to you from anywhere, anytime.

Two-Way Audio

Communicate with others with the built-in microphone and speaker.

Sound and Light Alarm

Trigger light and sound eQects to frighten away unwanted visitors.

Privacy Mode

Turn on the privacy mode to shut down the surveillance.

Sharing

Forward the videos you want to share through social networking platforms.

Speciϙcations

Camera

- Image Sensor: 1/2.9“
- Resolution: 1080p HD
- Night Vision: 850 nm IR LED up to 30 ft
- Lens: F/NO: 2.4; Focal Length: 4mm
- View Range: 360° horizontal and 114° vertical

Audio

- Audio Communication: 2-way audio
- Audio Input & Output: Built-in microphone and speaker

Video

- Video Compression: H.264
- Frame Rate: 15fps
- Video Streaming: 1080p

Activity Notiϙcations

- Input Trigger: Motion detection
- Output Notiϙcation: Push Notiϙcation

Hardware

- Button: RESET button
- Indicator LED: System LED
- Adapter Input: 100-240VAC, 50/60Hz, 0.3A
- Adapter Output: 9.0V/0.6A
- External Storage: Micro SD card slot (Supports up to 128GB)
- Dimensions (W x D x H): 3.4 x 3.3 x 4.6 in. (86.6 x 85 x 117.7 mm)

Speciϙcations


Network

- Wireless Rate:

  11Mbps(802.11b)

  54Mbps(802.11g)

  150Mbps(802.11n)
- Frequency: 2.4GHz
- Wireless Security: WEP, WPA/WPA2-PSK
- Security: 128 bit AES encryption with SSL/TLS
- Protocol: TCP/IP, DHCP, ARP, ICMP ,DNS, NTP, HTTP, HTTPS, UDP, ONVIF, RTSP

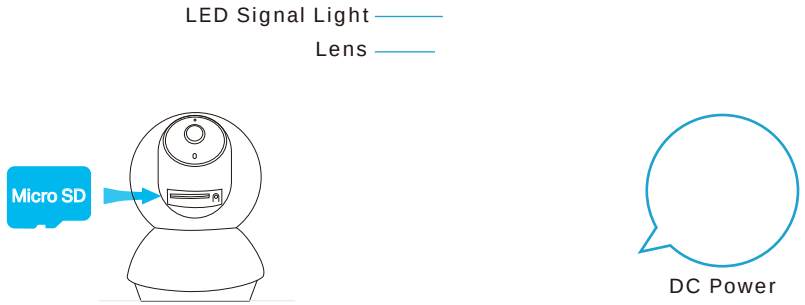

Others

- Package Contents:

  Tapo C200 Camera

  Power Adapter

  Quick Start Guide

  A Camera Base

  Mounting Screws

  Mounting Template

- Certiϙcations: FCC, IC, CE, NCC
- Operating Temperature: 0 ºC ~ 40 ºC (32°F ~ 104°F)
- Storage Temperature: -40°C~70°C (-40°F~158°F)
- Operating Humidity: 10%~90%RH, Non-condensing
- Storage Humidity: 5%~90%RH, Non-condensing

Speciϙcations are subject to change without notice. Tapo is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright Ä2019 TP-Link Technologies Co., Ltd. All rights reserved.