
Highlights


Superfast 4G LTE Speed for Reliable Wi-Fi

TL-MR6500v uses 4G LTE technology to achieve speeds of up to 150 Mbps download and 50 Mbps upload. It also shares a Wi-Fi network with maximum speed of 300 Mbps on 2.4 GHz for gaming, streaming, and more.[†]

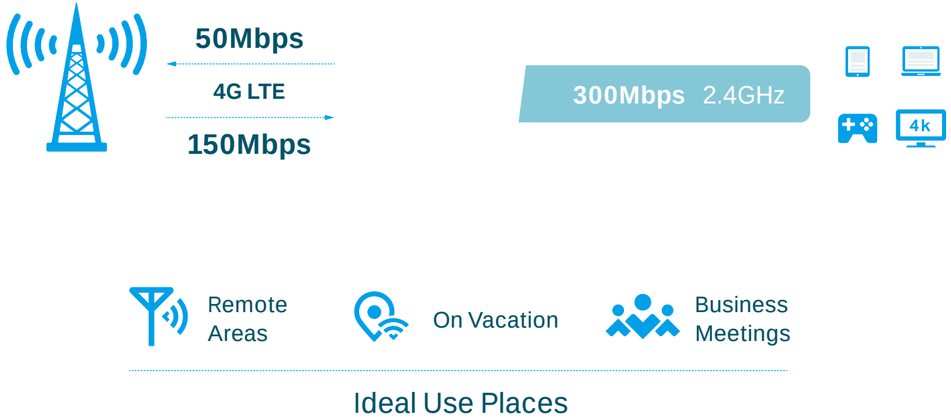

Professional Voice Functions


Make calls and surf the internet simultaneously with TL-MR6500v's VoLTE, CSFB, and VoIP functions. 50 MB of internal storage is enough space to record 100 minutes of voicemail.

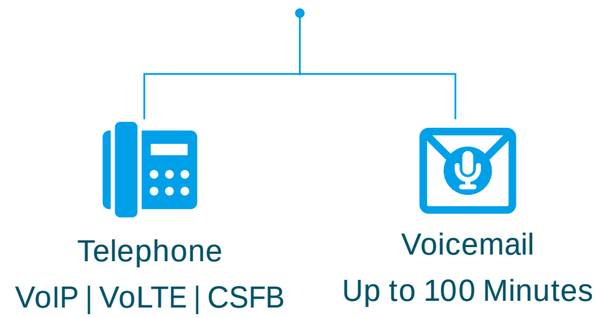

Highlights


Designed for Maximum Network Coverage

Advanced antennas establish e ȝ cient and stable connections to every device. Power Ampli Ǫer and Low Noise Ampli Ǫer boost sending and receiving capabilities, creating wide coverage for your home Wi-Fi network.

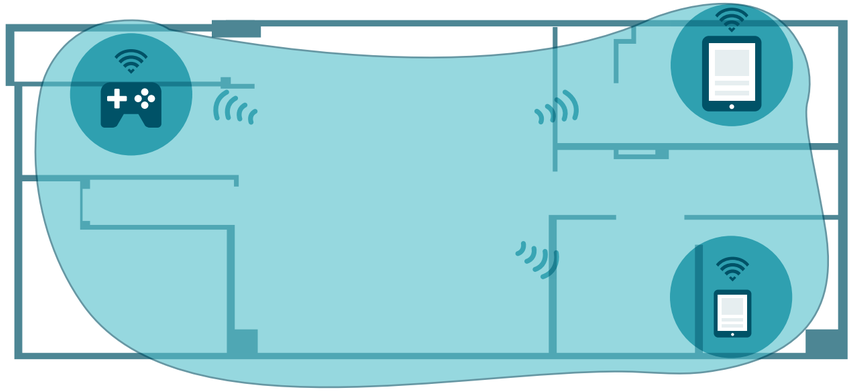

Powerful Processor for Superior Stability


Connect up to 32 wireless devices with ease, thanks to a powerful processor that boosts data transfer speeds while ensuring dependable network stability.

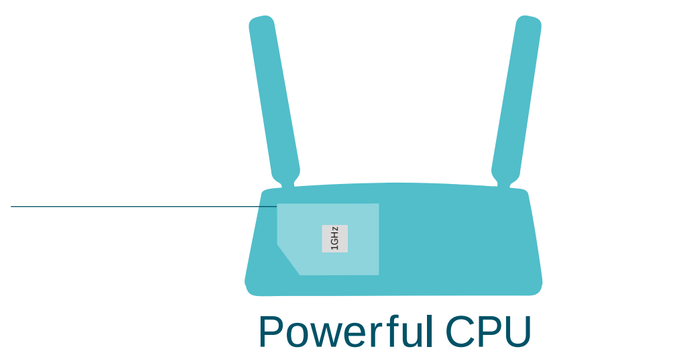

Highlights


Management Made Simple

Parental Controls let you easily manage your kids' internet use by limiting access. Guest Network secures your network by giving your visitors a separate access point to your Wi-Fi. Easily assign more bandwidth to your preferred devices with QoS.

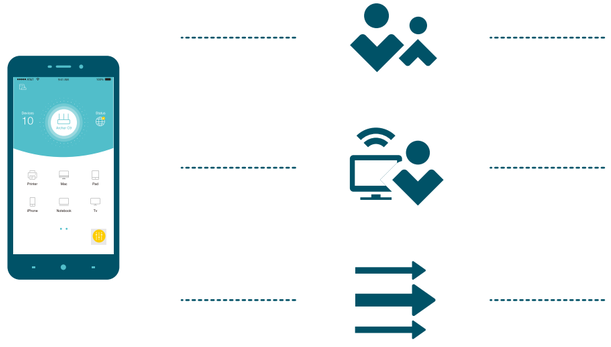


Available WAN Connection Backup

With a fully functional WAN/LAN port, TL-MR6500v works as a router compatible with cable, Ǫber, and DSL modems.

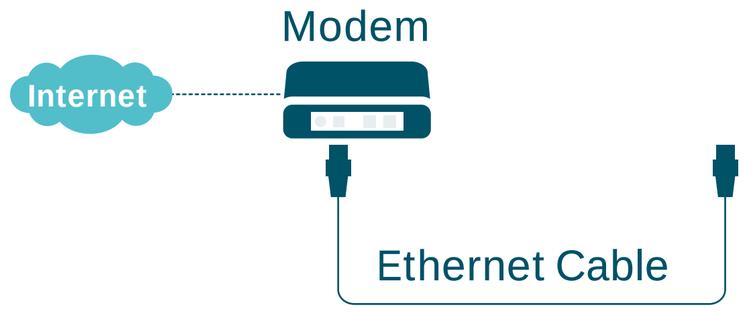

Features

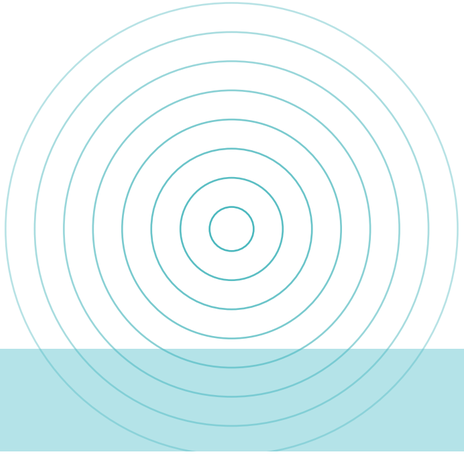

4G LTE

- 4G LTE – Ideal for cutting-edge 4G LTE network
- Faster Connections – Up to150 Mbps download speed and 50 Mbps upload speed
- Backward Compatible – Compatible with 4G/3G network

Speed

- 300 Mbps Wireless Speed – 300 Mbps Wi-Fi allows stable speed for wireless activities, such as streaming, surfing, browsing and posting social media

Wi-Fi Range

- Better Coverage – Integrated antennas provide stable wireless connections and better coverage

Features

Reliability

- Easy Bandwidth Management – Advanced QoS makes it easier for you to manage the bandwidth of connected devices
- Superior Stability – Powerful processor enables you to connect up to 32 wireless devices with ease

Ease of Use

- Intuitive Web UI – Ensures quick and simple installation without hassle
- Fast Encryption – One-touch WPA wireless security encryption with the WPS button
- Wi-Fi On/OQ ± Conveniently turn on or oQ wireless radio as required
- Hassle-free Management with Tether App – Network management is made easy with the TP-Link Tether App, available on any Android and iOS device
- Online Upgrade – Keeps you informed of the latest Q̃rmware and allows online upgrade on the web UI


Security

- Guest Network – Keeps your main network secure by creating a separate network for friends and visitors
- Access Control – Establishes a whitelist or blacklist to allow or restrict certain devices to access the internet
- Parental Controls – Restrict internet access time and contents for children devices
- Encryptions for Secure Network – WPA-PSK/WPA2-PSK encryptions provide active protection against security threats

SpeciQcations

Hardware

- Ports: 1× 10/100 Mbps LAN/WAN Port, 2× 10/100 Mbps LAN Ports, 1× Phone Port, 1 Nano SIM Card Slot
- Button: WPS/RESET Button, WiFi ON/OFF Button
- Antenna: 2 ò Detachable External 4G LTE Antennas
- External Power Supply: 12V/1A
- Dimensions (W x D x H): 7.95 ò 5.55 ò 1.32 in (202 ò 141 ò 33.6 mm)

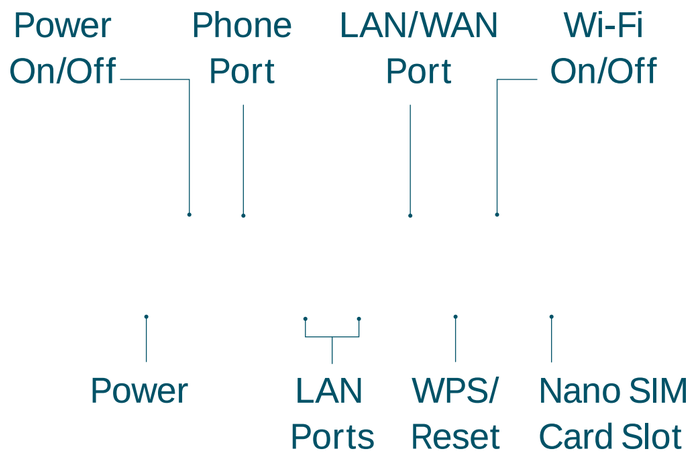

Wireless

- Network Type:

  4G: FDD-LTE: B1/B3/B7/B8/B20 (2100/1800/2600/900/800 MHz)

  TDD-LTE: B38/B40/B41 (2600/2300/2500 MHz)

  3G: DC-HSPA+/HSPA/UMTS: B1/B8 (2100/900 MHz)
- Wireless Standards: IEEE 802.11b, 802.11g, 802.11n
- Frequency: 2.4 GHz
- Signal Rate: 300 Mbps at 2.4 GHz
- CE EIRP: <20 dBm (2.4 GHz)
- Reception Sensitivity:

  11g 54M: -74 dBm

  11n HT20: -71 dBm

  11n HT40: -67 dBm
- Wireless Function: Enable/Disable Wireless Radio, Wireless Schedule, WMM, Wireless Statistics
- Wireless Security: 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK encryptions

Telephony

- VoIP Standards:

  SIP(RFC3261)/RTP(RFC1889/3550), G.711A/u, G.729AB, G.726
- Integrated Answering Machine:

  Stores 100 minutes long voice messages internally on the modem router.
- Advanced Telephone Functions:

  Call Blocking, Anonymous Call Blocks, Speed Dial, Emergency Number

SpeciQcations

Software

- **Operation Modes**: 3G/4G Router, Wireless Router
- **WAN Type**: Dynamic IP/Static IP/PPPoE/PPTP(Dual Access)/L2TP(Dual Access)
- **DHCP**: Server, Client, DHCP Client List, Address Reservation
- **Quality of Service**: WMM, QoS
- **Port Forwarding**: Virtual Server, Port Triggering, UPnP, DMZ
- **Dynamic DNS**: TP-Link DDNS, DynDns, NO-IP
- **VPN Passthrough**: PPTP, L2TP, IPSec
- **VPN Server**: PPTP VPN, OpenVPN
- **Access Control**: Parental Controls, Local Management Control, Host List, Access Control
- **Firewall Security**: DoS, SPI Firewall, IP and MAC Address Binding
- **Protocols**: IPv4, IPv6
- **Management**: Access Control, Local Management, Remote Management
- **Guest Network**: 2.4 GHz Guest Network

Others

- **CertiQcation**: CE, RoHS
- **Requirements**:

  Microsoft Windows 98SE, NT, 2000, XP, Vista ´ or Windows 7, 8, 8.1, MacOS, NetWare, UNIX or Linux

  Internet Explorer 11, Firefox 12.0, Chrome 20.0, Safari 4.0 browser or higher, or other Java-enabled browsers

  Nano SIM Card
- **Environment**

  Operating Temperature: 0¸ ~40¸ (32¸ ~104¸)

  Operating Humidity: 10%~90% non-condensing

  Storage Humidity: 5%~90% non-condensing
- **Package Contents**

  300Mbps Wireless N 4G LTE Telephony Router TL-MR6500v

  Power Adapter

  RJ45 Ethernet Cable

  RJ11 Cable

  Quick Installation Guide

  Telephony Feature Guide

For more information, please visit
https://www.tp-link.com/products/details/?model=TL-MR6500v_V1.2
or scan the QR code left

†Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 speciQcations. Actual wireless data throughput and wireless coverage, and quantity of connected devices are not guaranteed and will vary as a result of network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traZc, and client location.

Copyright ©2021 TP-Link